


10000 liters tank in Stainless 304



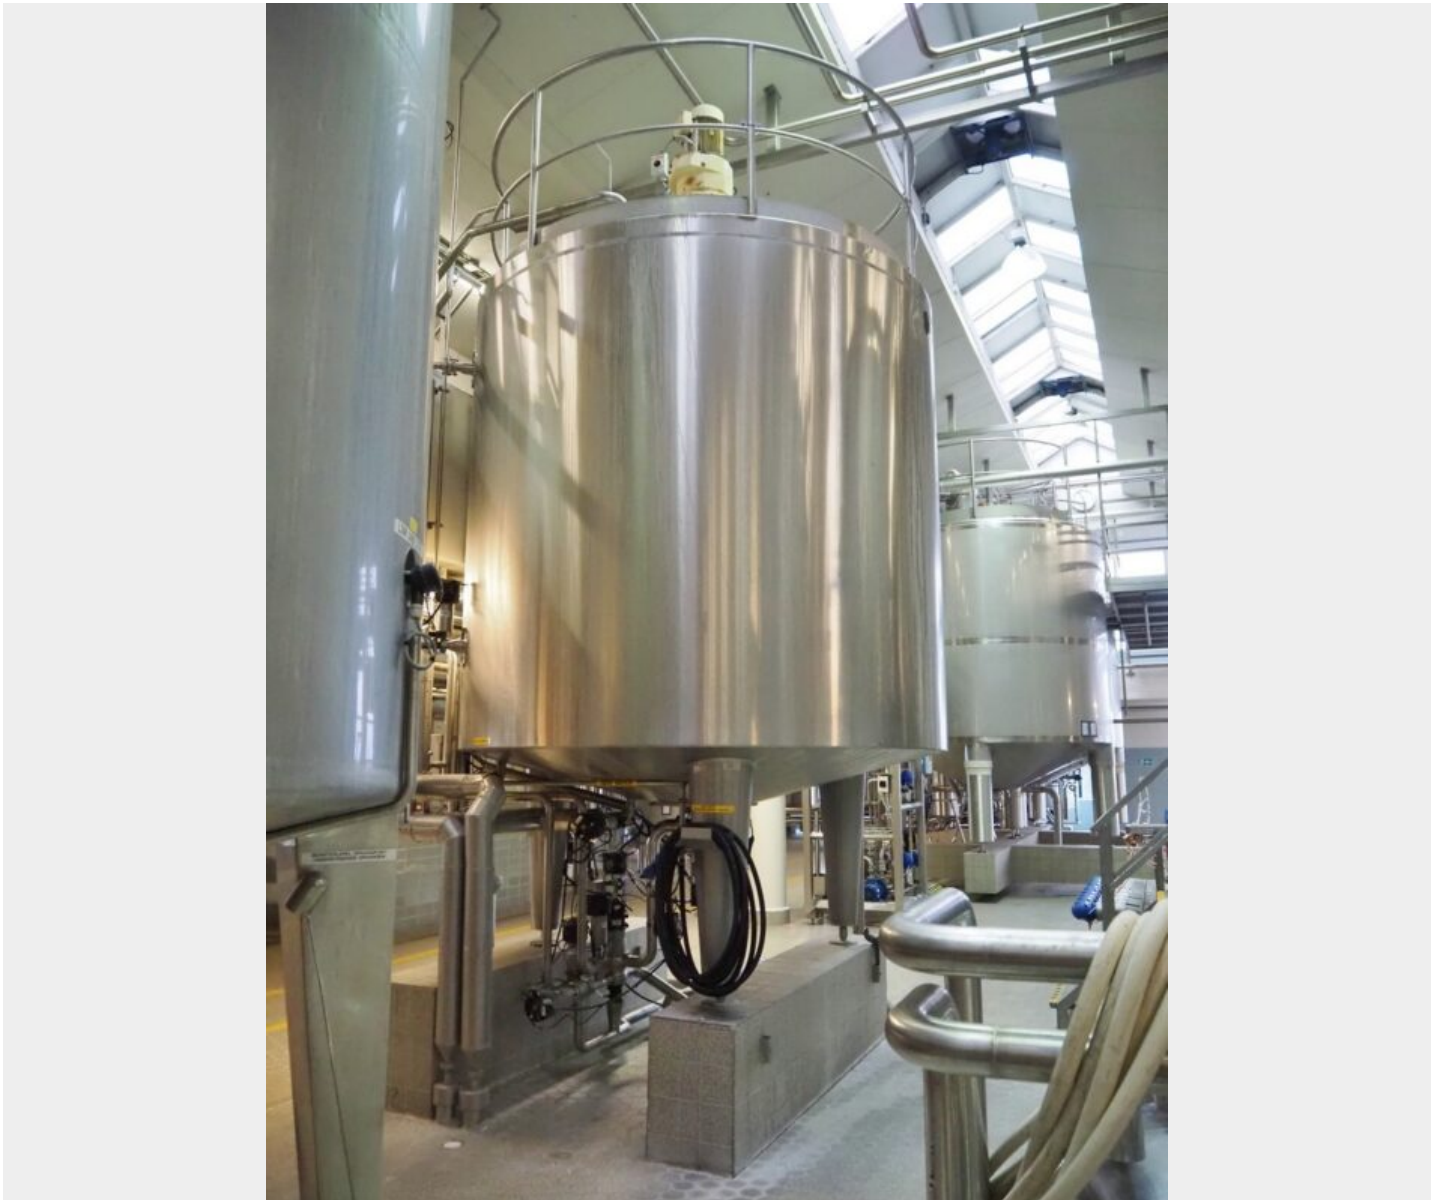

246 000 SEK /st exkl moms

Additional information: Food industry; 1 loose railing and 1 pallet with various fittings are included in the scope of delivery (see photos); these attachments were not taken into account when specifying the total height; fittings could also extend beyond the foot ends when used, so that the feet would have to be supported accordingly when using these fittings (see photo of previous installation)

Volumetric volume (L): 10.000 L

Pressure in tank: ATM - atmospheric

Material wet parts: SS AISI 304 (V2A)

Model: vertical

Configuration: insulated with heat-exchanger

Heat exchanger: yes

Insulation: yes

Mobile tank: no

Total discharge: yes

Max onderdruk: 3 Bar

Type HE on the bottom: half pipe welded onto the outside of the innertank

Type HE on the cylinder: half pipe welded onto the outside of the innertank

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Position of manway: in the bottom

Outlet of tank: available

Agitator: yes

Number of revolutions: 16 / 32

Power: 1.8 / 3.3

Internal diameter tank: 2.450 mm

Outer diameter tank: 2.650 mm

Cylinder height: 2.000 mm

Total height of tank: 5.100 mm



SKU: 435371

Mer information

Product Description

Material: Stainless steel 304

Model: Vertical

New / Used: Used

Operating Pressure in Tank: ATM – atmospheric

Configuration: insulated with heat-exchanger

Mobile Tank: No, it is not.

Övrig information: Food industry; 1 loose railing and 1 pallet with various fittings are included in the scope of delivery (see photos); these attachments were not taken into account when specifying the total height;

Agitator: Yes

Complete Drainage: Yes

Heating / Cooling: Yes

Contact Surface: SS AISI 304 (V2A)

Volume in liters: 10000

Equipment

Product Dokument finns: No, it is not.

Agitator flange: No

Nameplate: Yes

Technical Drawing Available: No, it is not.

Material Overview

Material: Stainless steel 304



Tank Dimensions

Cylinder Height: 2,000 mm
Internal diameter: 2,450 mm
Total Height: 5.100 mm
Outer diameter: 2,650 mm

Stirrer

Power (kW): 1.8 / 3.3
Speed (RPM): 16 / 32

Mer

Isolated: Yes