


12500 liters tank in Stainless 304



113 000 SEK /st exkl moms

Additional information: Food oil (castor oil); 1 loose footpedestal made of Fe for each tank is included; specified total height including footpedestal (approx. 970 mm); manhole diameter approx. 520 mm; outlet taps incomplete; small cracks in the insulation jacket; 1 small bead in the lower bottom (see interior photos); 1 tank with slight metallic discolouration inside (see inside photos); 1 control cabinet is included for one of the two tanks; some residues of previous content; bump at the insulation jacket

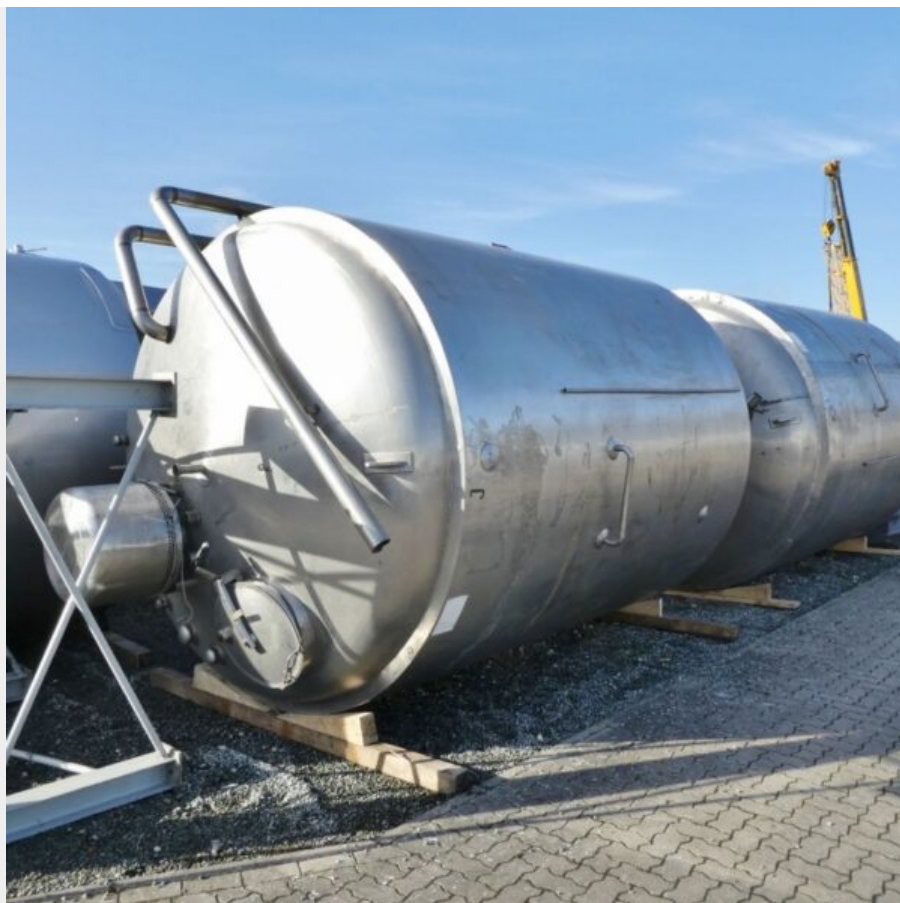

Volumetric volume (L): 12.500 L
Pressure in tank: ATM - atmosferic
Material wet parts: SS AISI 304 (V2A)
Model: vertical

Configuration: insulated
Heat exchanger: no
Insulation: yes
Mobile tank: no
Total discharge: yes

Documents included: no
Technical drawing included: no
Registration plate on the tank: no
Flange for agitator: no
Position of manway: in the bottom

Outlet of tank: DN80 DIN 11851
Agitator: yes
Number of revolutions: 240 / 480
Power: 3 / 12
Internal diameter tank: 2.490 mm

Outer diameter tank: 2.650 mm
Cylinder height: 2.600 mm
Total height of tank: 5.300 mm

SKU: 397283

Mer information



Product Description

Material: Stainless steel 304

Model: Vertical

New / Used: Used

Operating Pressure in Tank: ATM – atmospheric

Configuration: insulated

Mobile Tank: No, it is not.

Övrig information: Food oil (castor oil); 1 loose footpedestal made of Fe for each tank is included; specified total height including footpedestal (approx. 970 mm); manhole diameter approx. 520 mm; outlet taps

Agitator: Yes

Complete Drainage: Yes

Heating / Cooling: No

Contact Surface: SS AISI 304 (V2A)

Volume in liters: 12500

Equipment

Product Dokument finns: No, it is not.

Agitator flange: No

Nameplate: No, it is not.

Technical Drawing Available: No, it is not.

Material Overview

Material: Stainless steel 304

Tank Dimensions

Cylinder Height: 2.600 mm

Internal diameter: 2.490 mm

Total Height: 5,300 mm

Outer diameter: 2,650 mm

Stirrer

Power (kW): 3 / 12

Speed (RPM): 240 / 480



Mer

Isolated: Yes