


125000 liters tank in Stainless 304

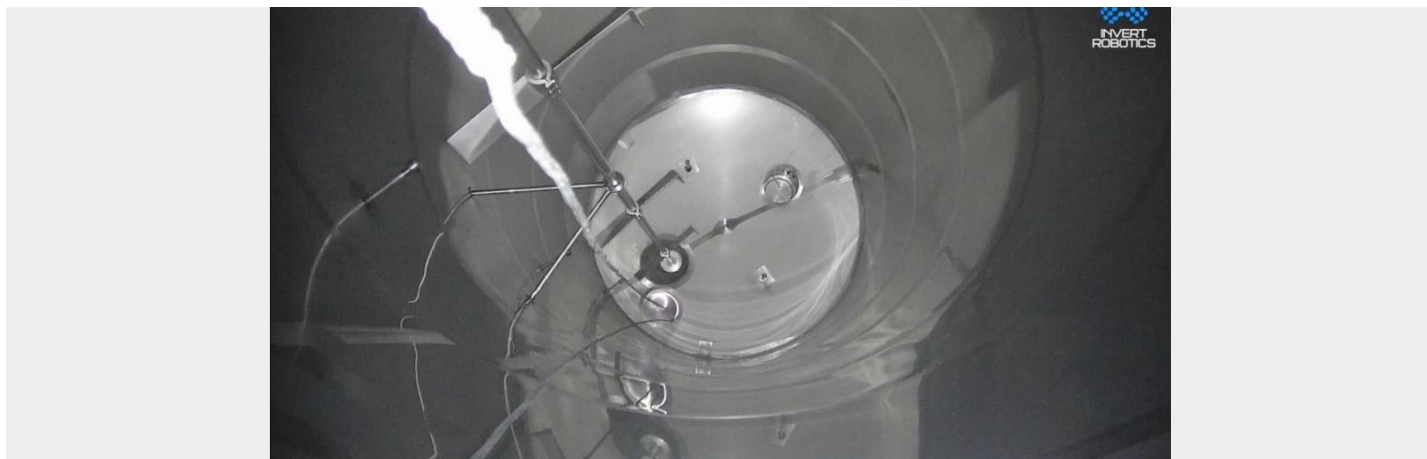

603 000 SEK /st exkl moms

Additional information: Dairy; Manhole cylinder 510/410 mm; wall thickness of cylinder: bottom segment: 4 mm; 3 subsequent segments: 3 mm; top 3 segments: 2.5 mm

Volumetric volume (L): 125.000 L

Pressure in tank: ATM - atmospheric

Material wet parts: SS AISI 304 (V2A)

Model: vertical

Configuration: insulated

Heat exchanger: no

Insulation: yes

Mobile tank: no

Total discharge: yes

Documents included: no

Technical drawing included: no

Registration plate on the tank: yes

Flange for agitator: no

Outlet of tank: 125

Agitator: yes

Power: 2 / 3.5

Bottom: 6 mm

Internal diameter tank: 3.850 mm

Outer diameter tank: 3.965 mm

Cylinder height: 10.570 mm

Total height of tank: 13.350 mm

SKU: 486098

Mer information

Product Description

Material: Stainless steel 304

Model: Vertical

New / Used: Used

Operating Pressure in Tank: ATM – atmospheric

Configuration: insulated

Mobile Tank: No, it is not.

Övrig information: Dairy; Manhole cylinder 510/410 mm; cylinder wall thickness: lowest segment: 4 mm; 3 subsequent segments: 3 mm; top 3 segments: 2.5 mm; we can't give any guarantees about the agitator

Agitator: Yes

Complete Drainage: Yes

Heating / Cooling: No

Contact Surface: SS AISI 304 (V2A)

Volume in liters: 125000



Equipment

Product Dokument finns: No, it is not.
Agitator flange: No
Nameplate: Yes
Technical Drawing Available: No, it is not.

Material Overview

Material: Stainless steel 304

Tank Dimensions

Cylinder Height: 10.570 mm
Internal diameter: 3.850 mm
Total Height: 13.350 mm
Outer diameter: 3.965 mm

Stirrer

Power (kW): 2 / 3.5

Tjocklek på tank

Bottom: 6 mm

Mer

Isolated: Yes