


15000 liter tank in Acid-proof 316

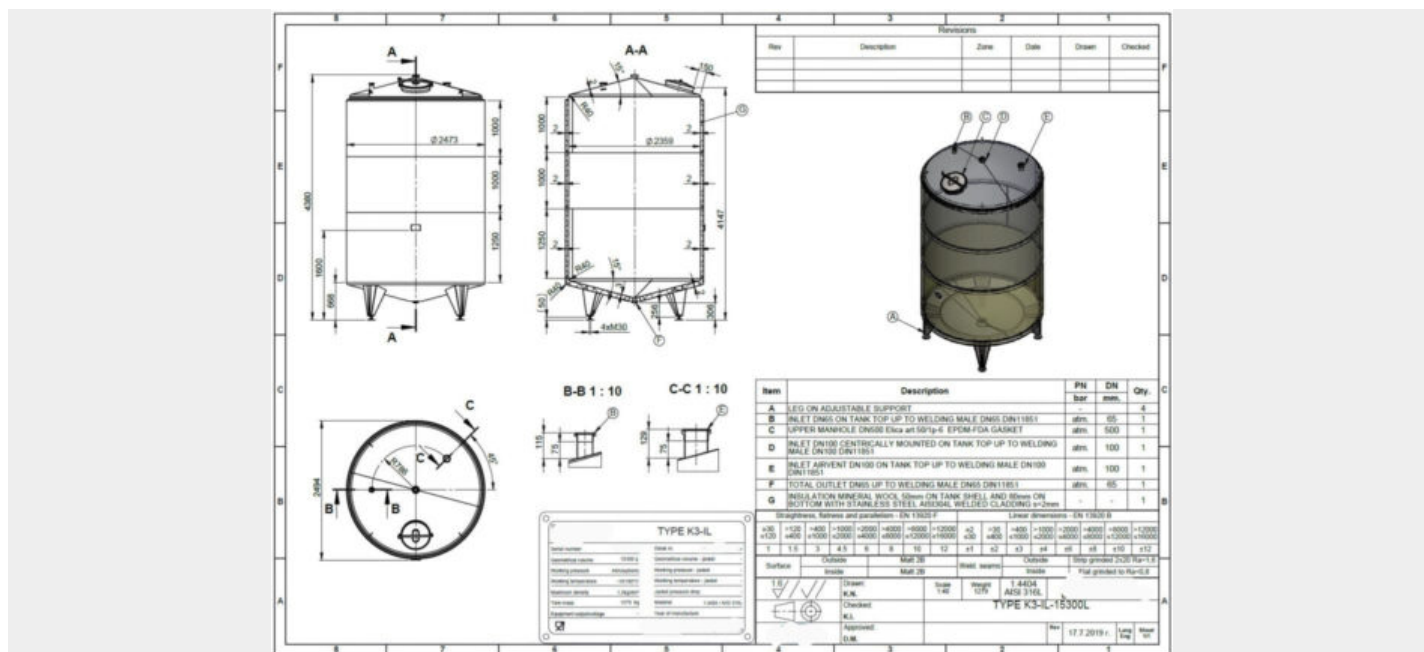

318 000 SEK /st exkl moms

item available on order

Article type: brand new storage tank - type K3-IL

Volumetric volume (L): 15.000 L

Max. density P (kg/m³): 1.200

Ra inner weld: 0,80

Finish stainless steel: 2B

Pressure in tank: ATM - atmosferic

Max. temperature (°C): 100 °C

Min. temperature (°C): -10 °C

Material wet parts: SS AISI 316L (V4A)



Model: vertical

Configuration: insulated

Heat exchanger: no

Insulation: yes

Mobile tank: no

Top type: conical 15 °

Shape of tank: cylindrical

Bottom type: conical 15 °

Total discharge: yes

Fixation points: 4 adjustable feet

Insulation material: Rockwool

Outer jacket (ornamental wall): RVS 304L

Manway(s): RVS 316

Gasket manway(s): EPDM

Fixation point(s): RVS 304

Suitable for food industry: yes

Documents included: yes, optional

Technical drawing included: yes

Registration plate on the tank: yes

Flange for agitator: no

Number of manways: 1

Position of manway: at the top

Height manhole 1 (mm): 500 mm

Tank outlet: inside Ø 65 mm

Outlet type: DIN11851

Outlet of tank: 65

Total outlet valve: no, optional

Agitator: no, optional

Top: 2 mm

Cylinder: 2 mm

Bottom: 3 mm

Cylinder: 2

Insulation body: yes



Bottom: 2

Insulation bottom/sides: yes

finish of the outer jacket: welded

Insulation thickness: 50

Internal diameter tank: 2.359 mm

Distance from outlet to ground: 306 mm

Outer diameter tank: 2.473 mm

Cylinder height: 3.250 mm

Feet height: 668 mm

Total height of tank: 4.380 mm

Empty weight tank: 1.300

SKU: 490311

Mer information



Product Description

Food-grade: Yes
Material: Acid-resistant 316
Model: Vertical
New / Used: Newly manufactured
Operating Pressure in Tank: ATM – atmospheric
Stainless steel finish: 2b
Configuration: insulated
Max. Service Temperature: 100 °C
Maximum Product Density: 1200
Min. Operating Temperature: -10 °C
Mobile Tank: No, it is not.
Agitator: No
Ra Internal Weld: 0,80
Tank Shape: cylindrical
Complete Drainage: Yes
Bottom Type: conical 15 °
Heating / Cooling: No
Contact Surface: SS AISI 316L (V4A)
Volume in liters: 15000

Equipment

Agitator flange: No
Nameplate: Yes
Food-grade: Yes
Tank Outlet: inside Ø 65 mm
Technical Drawing Available: Yes
Outlet Type: DIN11851

Material Overview

Material: Acid-resistant 316
Fixing point(s): RVS 304
Insulation material: Rockwool
Exterior cladding: RVS 304L



Tank Dimensions

Cylinder Height: 3.250 mm
Height on legs: 668 mm
Internal diameter: 2,359 mm
Outlet Height to Ground: 306 mm
Total Height: 4,380 mm
Outer diameter: 2,473 mm

Tjocklek på tank

Bottom: 3 mm
Cylinder: 2 mm
Top: 2 mm

Outer Cladding and Insulation Thickness

External jacket finish: welded
Insulation bottom/end caps: Yes
Jacket insulation: Yes
Insulation material: Rockwool

Mer

Cylinder OW: 2
Bottom OW: 2
Insulation Thickness OW: 50
Isolated: Yes
Weight: 1.300