
2000 liter tank in Acid-proof 316

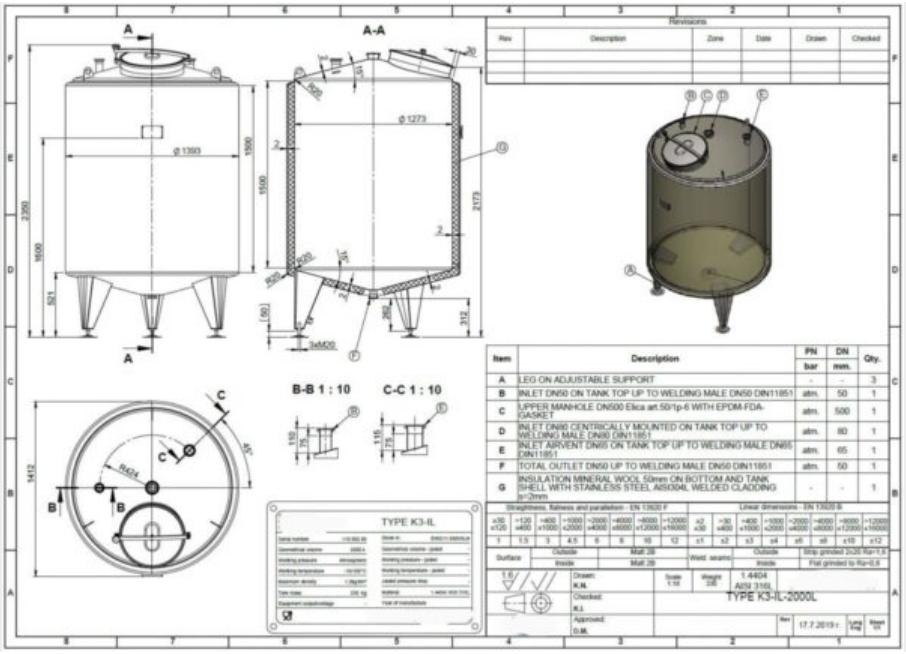

125 000 SEK /st exkl moms

item available on order

Article type: brand new storage tank - type K3-IL
Volumetric volume (L): 2.000 L
Max. density P (kg/m³): 1.200
Ra inner weld: 0,80
Finish stainless steel: 2B

Pressure in tank: ATM - atmosferic
Max. temperature (°C): 150 °C
Min. temperature (°C): -10 °C
Material wet parts: SS AISI 316L (V4A)

Model: vertical

Configuration: insulated
Heat exchanger: no
Insulation: yes
Mobile tank: no
Top type: conical 15 °

Shape of tank: cylindrical
Bottom type: conical 15 °
Bottom outlet: yes
Total discharge: yes
Fixation points: 3 adjustable feet

Insulation material: Rockwool
Outer jacket (ornamental wall): RVS 304L
Manway(s): RVS 316
Gasket manway(s): EPDM
Fixation point(s): RVS 304

Suitable for food industry: yes
Documents included: yes, optional
Technical drawing included: yes
Registration plate on the tank: yes
Flange for agitator: no

Number of manways: 1
Position of manway: headside
Hinged lid: yes
Tank outlet: inside Ø 50 mm
Outlet type: DIN11851

Total outlet valve: no, optional
Agitator: no, optional
Top: 2 mm
Cylinder: 2 mm
Bottom: 2 mm

Top: 2
Cylinder: 2

Insulation body: yes
Bottom: 2
Insulation bottom/sides: yes

finish of the outer jacket: welded
Insulation thickness: 50
Distance from outlet to ground: 312 mm
Outer diameter tank: 1.412 mm
Cylinder height: 1.500 mm

Feet height: 521 mm
Total height of tank: 2.350 mm
Empty weight tank: 330

SKU: 444950

Mer information

Product Description

Food-grade: Yes
Material: Acid-resistant 316
Model: Vertical
New / Used: Newly manufactured
Operating Pressure in Tank: ATM – atmospheric
Stainless steel finish: 2b
Configuration: insulated
Max. Service Temperature:
Maximum Product Density: 1200
Min. Operating Temperature: -10 °C
Mobile Tank: No, it is not.
Agitator: No
Ra Internal Weld: 0,80
Tank Shape: cylindrical
Complete Drainage: Yes
Bottom Type: conical 15 °
Heating / Cooling: No
Contact Surface: SS AISI 316L (V4A)
Volume in liters: 2000

Equipment

Agitator flange: No
Nameplate: Yes
Food-grade: Yes
Inspected by: TUV
Tank Outlet: inside Ø 50 mm
Technical Drawing Available: Yes
Outlet Type: DIN11851

Material Overview

Material: Acid-resistant 316
Fixing point(s): RVS 304
Insulation material: Rockwool
Exterior cladding: RVS 304L

Tank Dimensions
Cylinder Height: 1.500 mm
Height on legs: 521 mm
Outlet Height to Ground: 312 mm
Total Height: 2.350 mm
Outer diameter: 1.412 mm

Tjocklek på tank
Bottom: 2 mm
Cylinder: 2 mm
Top: 2 mm

Outer Cladding and Insulation Thickness
External jacket finish: welded
Insulation bottom/end caps: Yes
Jacket insulation: Yes
Insulation material: Rockwool

Mer
Cylinder OW: 2
Bottom OW: 2
Insulation Thickness OW: 50
Isolated: Yes
Weight: 330