


## 3158 liter tank in Syrafast 316

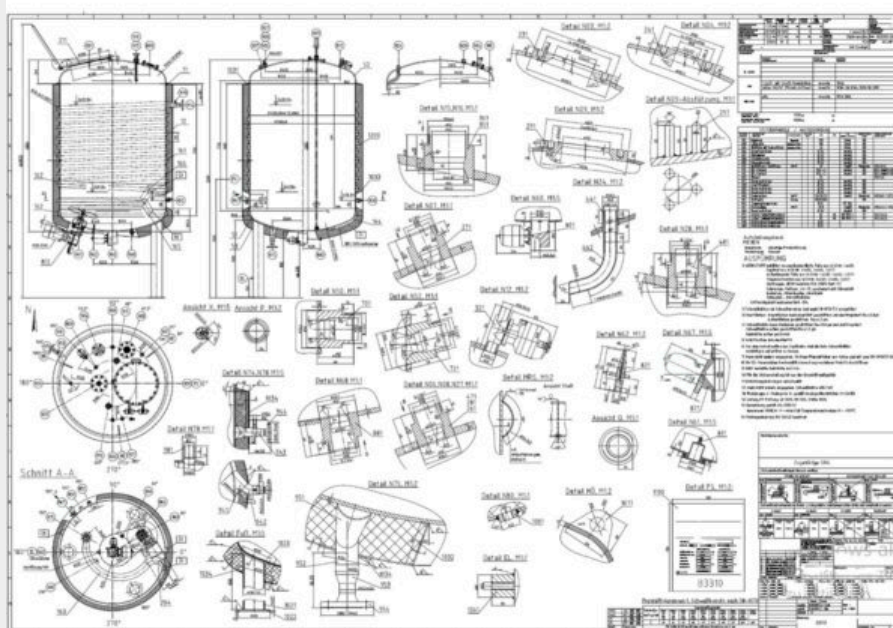

320 000 SEK /st exkl moms

**Additional information:** tank is unused, was only filled with demineralised water for pressure testing

**Volumetric volume (L):** 3.158 L

**Pressure in tank:** ATM - atmosferic

**Max. pressure (Bar):** 6 Bar



**Min. pressure (Bar):** 1 Bar

**Max. temperature (°C):** 150 °C

**Material wet parts:** SS AISI 316 (V4A)

**Model:** vertical

**Configuration:** single jacketed with heat-exchanger

**Heat exchanger:** yes

**Insulation:** no

**Mobile tank:** no

**Total discharge:** no

**Volume:** 90 L

**Max Overpressure:** 10 Bar

**Max onderdruk:** 1 Bar

**Max. working temperature:** 150 °C

**Type HE on the cylinder:** half pipe welded onto the outside of the innertank

**Heat exchanger:** RVS 316

**Documents included:** no

**Technical drawing included:** no

**Registration plate on the tank:** yes

**Flange for agitator:** no

**Position of manway:** headside

**Outlet of tank:** available

**Top:** 10,50 mm

**Cylinder:** 5,60 mm

**Bottom:** 7,50 mm

**Internal diameter tank:** 1.400 mm

**Outer diameter tank:** 1.580 mm

**Cylinder height:** 1.680 mm

**SKU:** 433583



## Mer information

### Product Description

Material: Acid-resistant 316

Model: Vertical

New / Used: Used

Operating Pressure in Tank: ATM – atmospheric

Configuration: single jacketed with heat-exchanger

Max. Service Temperature: 150 °C

Mobile Tank: No, it is not.

Övrig information: tank is unused, was only filled with demineralized water for pressure testing

Agitator: No

Overpressure: 6 bars

Complete Drainage: No, it is not.

Vacuum Pressure: 1 bar

Pressure Vessel: Yes

Heating / Cooling: Yes

Contact Surface: SS AISI 316 (V4A)

Volume in liters: 3158

### Equipment

Product Dokument finns: No, it is not.

Agitator flange: No

Nameplate: Yes

Technical Drawing Available: No, it is not.

### Material Overview

Material: Acid-resistant 316



## **Tank Dimensions**

Cylinder Height: 1.680 mm  
Internal diameter: 1.400 mm  
Outer diameter: 1.580 mm

## **Tjocklek på tank**

Bottom: 7,50 mm  
Cylinder: 5,60 mm  
Top: 10,50 mm

## **Mer**

Heat Exchanger: RVS 316  
Isolated: No