


3200 liter tank in Acid-proof 316

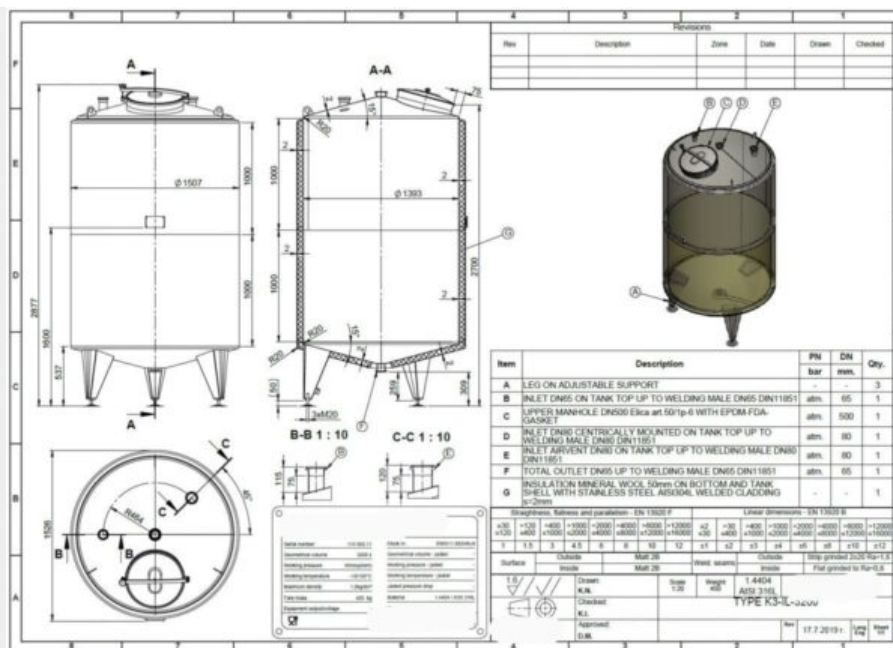

140 000 SEK /st exkl moms

item available on order

Article type: brand new storage tank - type K3-IL

Volumetric volume (L): 3.200 L

Max. density P (kg/m³): 1.200

Ra inner weld: 0,80

Finish stainless steel: 2B

Pressure in tank: ATM - atmosferic

Max. temperature (°C): 150 °C

Min. temperature (°C): -10 °C

Material wet parts: SS AISI 316L (V4A)



Model: vertical

Configuration: insulated

Heat exchanger: no

Insulation: yes

Mobile tank: no

Top type: conical 15 °

Shape of tank: cylindrical

Bottom type: conical 15 °

Bottom outlet: yes

Total discharge: yes

Fixation points: 3 adjustable feet

Insulation material: Rockwool

Outer jacket (ornamental wall): RVS 304

Manway(s): RVS 316

Gasket manway(s): EPDM

Fixation point(s): RVS 304

Suitable for food industry: yes

Documents included: yes, optional

Technical drawing included: yes

Registration plate on the tank: yes

Flange for agitator: no

Number of manways: 1

Position of manway: headside

Hinged lid: yes

Tank outlet: inside Ø 65 mm

Outlet type: DIN11851

Total outlet valve: no, optional

Agitator: no, optional

Top: 2 mm

Cylinder: 2 mm

Bottom: 2 mm

Top: 2

Cylinder: 2

Insulation body: yes

Bottom: 2

Insulation bottom/sides: yes

finish of the outer jacket: welded

Insulation thickness: 50

Distance from outlet to ground: 309 mm

Outer diameter tank: 1.526 mm

Cylinder height: 2.000 mm

Feet height: 537 mm

Total height of tank: 2.877 mm

Empty weight tank: 450

SKU: 455135

Mer information



Product Description

Food-grade: Yes
Material: Acid-resistant 316
Model: Vertical
New / Used: Newly manufactured
Operating Pressure in Tank: ATM – atmospheric
Stainless steel finish: 2b
Configuration: insulated
Max. Service Temperature:
Maximum Product Density: 1200
Min. Operating Temperature: -10 °C
Mobile Tank: No, it is not.
Agitator: No
Ra Internal Weld: 0,80
Tank Shape: cylindrical
Complete Drainage: Yes
Bottom Type: conical 15 °
Heating / Cooling: No
Contact Surface: SS AISI 316L (V4A)
Volume in liters: 3200

Equipment

Agitator flange: No
Nameplate: Yes
Food-grade: Yes
Tank Outlet: inside Ø 65 mm
Technical Drawing Available: Yes
Outlet Type: DIN11851

Material Overview

Material: Acid-resistant 316
Fixing point(s): RVS 304
Insulation material: Rockwool
Exterior cladding: RVS 304



Tank Dimensions

Cylinder Height: 2,000 mm

Height on legs: 537 mm

Outlet Height to Ground: 309 mm

Total Height: 2.877 mm

Outer diameter: 1.526 mm

Tjocklek på tank

Bottom: 2 mm

Cylinder: 2 mm

Top: 2 mm

Outer Cladding and Insulation Thickness

External jacket finish: welded

Insulation bottom/end caps: Yes

Jacket insulation: Yes

Insulation material: Rockwool

Mer

Cylinder OW: 2

Bottom OW: 2

Insulation Thickness OW: 50

Isolated: Yes

Weight: 450