


## 10300 liter tank in Acid-proof 316

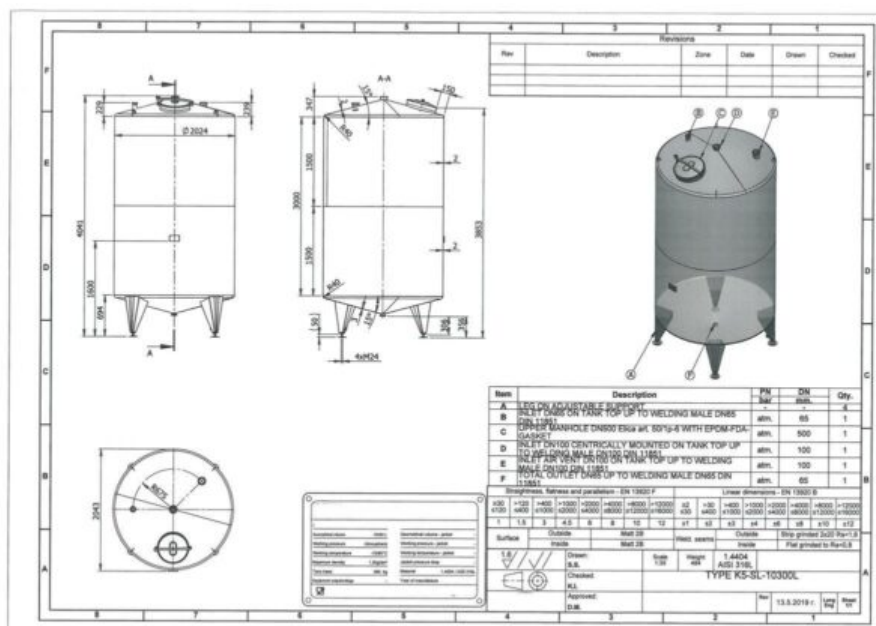

169 000 SEK /st exkl moms

item available on order

**Article type:** brand new storage tank - type K5-SL

**Additional information:** inner surface 0.8μ

**Volumetric volume (L):** 10.300 L

**Max. density P (kg/m³):** 1.200

**Ra inner weld:** 0,80

**Finish stainless steel:** 2B

**Pressure in tank:** ATM - atmosferic

**Max. temperature (°C):** 100 °C

**Min. temperature (°C):** -10 °C



**Material wet parts:** SS AISI 316L (V4A)

**Model:** vertical

**Configuration:** single-skin

**Heat exchanger:** no

**Insulation:** no

**Mobile tank:** no

**Top type:** conical 15 °

**Shape of tank:** cylindrical

**Bottom type:** conical 15 °

**Total discharge:** yes

**Fixation points:** 4 adjustable feet

**Manway(s):** RVS 316

**Gasket manway(s):** EPDM

**Fixation point(s):** RVS 304L

**Suitable for food industry:** yes

**Documents included:** yes, optional

**Technical drawing included:** yes

**Registration plate on the tank:** yes

**Inspection of:** TUV

**Flange for agitator:** no

**Number of manways:** 1

**Position of manway:** at the top

**Height manhole 1 (mm):** 500 mm

**Tank outlet:** inside Ø 65 mm

**Outlet type:** DIN11851 male

**Total outlet valve:** no, optional

**Agitator:** no, optional

**Top:** 2 mm

**Cylinder:** 2 mm

**Bottom:** 3 mm

**Distance from outlet to ground:** 306 mm

**Outer diameter tank:** 2.024 mm

**Cylinder height:** 3.000 mm

**Feet height:** 694 mm

**Total height of tank:** 4.040 mm

**Empty weight tank:** 484

**SKU:** 381221

## Mer information

### Product Description

Food-grade: Yes

Material: Acid-resistant 316

Model: Vertical

New / Used: Newly manufactured

Operating Pressure in Tank: ATM – atmospheric

Stainless steel finish: 2b

Configuration: single-skin

Max. Service Temperature: 100 °C

Maximum Product Density: 1200

Min. Operating Temperature: -10 °C

Mobile Tank: No, it is not.

Övrig information: inner surface 0.8μ

Agitator: No

Ra Internal Weld: 0,80

Tank Shape: cylindrical

Complete Drainage: Yes

Bottom Type: conical 15 °

Heating / Cooling: No

Contact Surface: SS AISI 316L (V4A)

Volume in liters: 10300



## Equipment

Agitator flange: No  
Nameplate: Yes  
Food-grade: Yes  
Inspected by: TUV  
Tank Outlet: inside Ø 65 mm  
Technical Drawing Available: Yes  
Outlet Type: DIN11851 male

## Material Overview

Material: Acid-resistant 316  
Fixing point(s): RVS 304L

## Tank Dimensions

Cylinder Height: 3,000 mm  
Height on legs: 694 mm  
Outlet Height to Ground: 306 mm  
Total Height: 4,040 mm  
Outer diameter: 2,024 mm

## Tjocklek på tank

Bottom: 3 mm  
Cylinder: 2 mm  
Top: 2 mm

## Mer

Isolated: No  
Weight: 484